



Project: \_\_\_\_\_ Type: \_\_\_\_\_

Item. No. \_\_\_\_\_

Location: \_\_\_\_\_

Notes: \_\_\_\_\_

# DPCL2


designer power communication series

### standard features

- Electrical rating: 120V, 60 Hz
- Power cord: 10' 14/3 SJT (black) with right angle plug
- Finish: Black
- Construction: metal
- Tamper-resistant outlets (meets NEC requirements)
- Powered USB (A-style) – compatible with USB 2.0 & 3.0 devices
- Switch/breaker combo (SW)
- Installation method: 2 mounting brackets (when installed, no exposed hardware), adjustable for different panel thickness (min 1/2" – max 1 1/4")
- Recess mount only – see drawing for route size
- UL & cUL

### options

- Hospital grade outlets and power cord
- Surge suppression (SS)
- Female connector (FC)
- The following options are available – minimums may apply
  - Circuit breaker (BR)
  - Rockerswitch (RKS)
  - Non-powered pass-thru telephone, data, HDMI, etc.
  - Finishes below, other than standard black
  - Contact factory for custom options

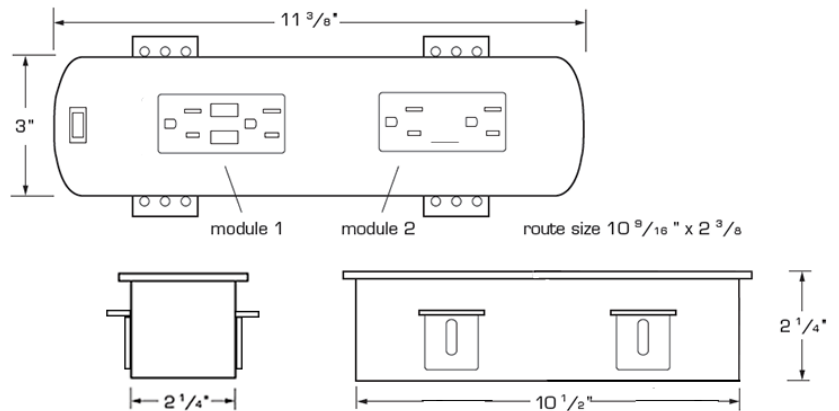

### ordering information (DPCL2-C1-A1-1-BK)

product	model	module 1 module type & color	module 2 module type & color	power cord	finish	surge	options
<b>DPCL</b>	<b>2</b>	<b>C1</b>	<b>A1</b>	<b>1</b>	<b>BK</b>		
DPCL	2 2 modules	A-J 15A O-W 20A color options 1 black 2 ivory 3 light almond 4 nickel* 5 white 6 grey* 7 red*	A-J 15A O-W 20A color options 1 black 2 ivory 3 light almond 4 nickel* 5 white 6 grey* 7 red*	1 10' 14/3 SJT (standard with 15A modules) 2 10' 14/3 SJT-HG 3 10' 12/3 SJT-20A (standard with 20A modules) 4 10' 12/3 SJT-HG	BK black (standard) IV ivory LA light almond NK nickel WH white	blank none SS surge	blank none FC female connector BR breaker RKS rocker switch 5E RJ45 data 6 RJ45 data USB non-powered pass-thru
*not available for all modules							

module selection

15A modules – for use with 14/3 power cord



A  
two outlets



B  
one outlet  
two charging  
USBs  
(2.1A total  
charging  
capacity)



C  
two outlets  
two charging  
USBs  
(3.1A total  
charging  
capacity)



H  
Hospital Grade  
two outlets



J  
Hospital Grade  
two outlets  
two charging  
USBs  
(3.1A total  
charging  
capacity)

20A modules – for use with 12/3 power cord



O  
two outlets



P  
one outlet  
two charging  
USBs  
(2.1A total  
charging  
capacity)



Q  
two outlets  
two charging  
USBs  
(3.1A total  
charging  
capacity)



U  
Hospital Grade  
two outlets



W  
Hospital Grade  
two outlets  
two charging  
USBs  
(3.1A total  
charging  
capacity)

color options for modules



1 = black  
(standard)



2 = ivory



3 = light almond



4 = nickel\*



5 = white



6 = grey\*



7 = red\*

\*not available for all modules