




## PH4000 series

POWRFLEX harness

Project:	Type:
Item. No.	
Location:	
Notes:	



### cross section

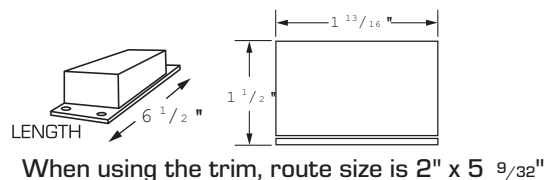

### electrical

- Electrical rating: 120V, 60Hz , 12 Amp
- Power cord: 10' 16/3 SPT-3 (black) with right angle NE plug
- Up to 3 Tamper-Resistant electrical receptacles

### construction

- High-impact, flame resistant PVC
- Finish: black

### mounting/installation


- Recessed or surface mounting using screws (not included) for recess mounting, route 1 <sup>7</sup>/<sub>8</sub>" x 5 <sup>1</sup>/<sub>8</sub>"

### warranty/certification

- 1 year
- UL and cUL (complies with UL962A)

### options

- 10' 14/3 SJT (black) power cord with right angle NE plug
- Charging USB
- ON/Off rockerswitch or Remote switch
- RJ45 Cat 5e and Cat 6 data jack and cable for high-speed data connectivity
- RJ11 phone jack with black 14' telephone cord
- Black 48" coaxial cable
- Surge suppression - UL listed
- Custom options - *contact factory*



## ordering information

item number w/ 10' 16/3 SPT-3	item number w/ 10' 14/3 SJT	catalog number	# outlets	coaxial/phone/data	mounting
5000-0537	5000-1071	PH4202-CUST	2 spaced	None	Recess
5000-0868	5000-1045	PH4221-5e	2	(1) RJ45 - Cat 5e data jack	Surface
5000-0656	5000-1046	PH4222-5e	2	(1) RJ45 - Cat 5e data jack	Recess
5000-1019	5000-0808	PH4222-5e-SPEC	2	(1) RJ45 - Cat 5e data jack, outlets spaced	Recess
5000-1049	5000-1050	PH4241-5e/5e	2	(2) RJ45 - Cat 5e data jacks	Surface
5000-1022	5000-1052	PH4242-5e/5e	2	(2) RJ45 - Cat 5e data jacks	Recess
5000-0959	5000-1053	PH4242-11/5e	2	(1) RJ11 & (1) RJ45 - Cat5e data jack	Recess
5000-4301	5000-0878	PH4301	3	None	Surface
5000-0638	5000-1556	PH4302	3	None	Recess
5000-0828	5000-1558	PH4321-5e	3	(1) RJ45 - Cat 5e data jack	Surface
5000-1560	5000-1250	PH4322-5e	3	(1) RJ45 - Cat 5e data jack	Recess
5000-1171	N/A	PH4202-16U	2	(1) Charging USB	Recess
N/A	5000-1178	PH4202-14U	2	(1) Charging USB	Recess



PH4202-16U



PH4202-CUST



PH4242-5e/5e



PH4222-5e-Spec

## accessory

item number	description
40-01222	trim



### NOTE:

- route for trim 2" x 5<sup>9</sup>/<sub>32</sub>"
- overall dimension with trim 2<sup>9</sup>/<sub>16</sub>" x 5<sup>3</sup>/<sub>4</sub>"