



Project: _____ Type: _____

Item. No. _____

Location: _____

Notes: _____


PH5000 series

POWERFLEX harness



standard features

- Electrical rating: 120V, 60Hz, 12 Amp
- Power cord: 10' 16/3 SPT-3 (black) with right angle NE plug
- Tamper-Resistant electrical receptacles
- Finish: black
- Construction: high impact, flame resistant PVC
- Installation method: recessed or surface mounting using screws (not included); for recess mounting, route 1 7/8" x 3 5/16"
- UL and cUL (complies with UL962A)

optional features

- 10' 14/3 SJT (black) power cord with right angle NE plug
- Black 48" coaxial cable
- Surge suppression 
- Contact factory for custom options

PH5000 cross section

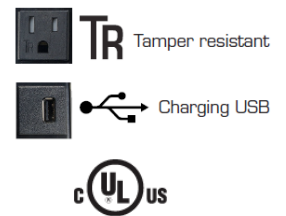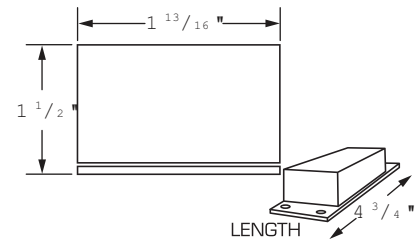

ordering information

item number w/10' 16/3 SPT-3	item number w/10' 14/3 SJT	catalog number	# outlets	coaxial/phone/data	mounting
5000-5201	5000-1027	PH5201	2	none	surface
5000-0577	5000-0450	PH5202	2	none	recess
5000-0052	N/A	PH5101-16U	1	(1) USB Charging	* surface
N/A	5000-0053	PH5101-14U	1	(1) USB Charging	* surface

Note:

* surface - Cord must exit box as pictured. Surface mount is the only option for this item.