



Project: _____ Type: _____

Item. No. _____

Location: _____


Notes: _____

PH5000 series

POWRFLEX harness



cross section

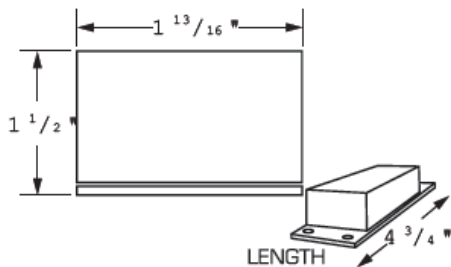

specifications

electrical

- Electrical rating: 120V, 60Hz , 12 Amp
- Power cord: 10' 16/3 SPT-3 (black) with right angle NE plug
- Up to 2 Tamper-Resistant electrical receptacles

construction

- High-impact, flame resistant PVC
- Finish: black

mounting/installation

- Recessed or surface mounting using screws (not included) for recess mounting, route 1⁷/₈" x 3⁵/₁₆"

warranty/certification

- 1 year
- UL and cUL (complies with UL962A)

options

- 10' 14/3 SJT (black) power cord
- Black 48" coaxial cable
- Surge suppression - UL listed
- Custom options - *contact factory*

ordering information



item number w/ 10' 16/3 SPT-3	item number w/ 10' 14/3 SJT	catalog number	# outlets	coaxial/phone/data	mounting
5000-5201	5000-1027	PH5201	2	none	surface
5000-0577	5000-0450	PH5202	2	none	recess
5000-0052	N/A	PH5101-16U	1	(1) USB charging	*surface
N/A	5000-0053	PH5101-14U	1	(1) USB charging	*surface

NOTE:

*surface mount with USB charging - cord must exit box from side Surface mount is only option for this item.



PH5201



PH5202



PH5101-14U

