




## PH6000 series

Project:	Type:
Item. No.	
Location:	
Notes:	

### POWERFLEX harness

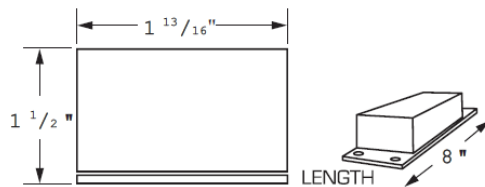

PH6000 cross section

#### electrical

- Electrical rating: 120V, 60Hz , 12 Amp
- Power cord: 10' 16/3 SPT-3 (black) with right angle NE plug
- Up to 5 Tamper-Resistant electrical receptacles
- Illuminated rocker switch with circuit breaker reset combination (where applicable)
  - Catalog number suffix = SW

#### construction

- High-impact, flame resistant PVC
- Finish: black

#### mounting/installation

- Recessed or surface mounting using screws (not included) for recess mounting, route 1<sup>7</sup>/<sub>8</sub>" x 8"

#### warranty/certification

- 1 year
- UL and cUL (complies with UL962A)

#### options

- 10' 14/3 SJT (black) power cord with right angle NE plug
- Charging USB
- ON/Off rockerswitch on remote lead - length specified by customer
  - Catalog number suffix = RSxx"
- RJ45 Cat 5e and Cat 6 data jack and cable for high-speed data connectivity
- RJ11 phone jack with black 14' cable
- Black 48" coaxial cable
- Surge suppression - UL listed
- Custom options - *contact factory*



*ordering information*

item number w/ 10' 16/3 SPT-3	item number w/ 10' 14/3 SJT	catalog number	# outlets	coaxial/ phone/ data	mounting
5000-0610	5000-6401	PH6401	4	None	Surface
5000-0606	N/A	PH6401-RS30	4	None	Surface
5000-1034	5000-0853	PH6501	5	None	Surface
5000-0516	5000-1040	PH6501-SW	5	None	Surface
5000-1035	5000-1041	PH6502-SW	5	None	Recess
N/A	5000-0301	PH6402-14U-SW	4	(1) Charging USB	Recess
5000-0300	N/A	PH6402-16U-SW	4	(1) Charging USB	Recess



PH6401-RSXX



PH6502-SW



PH6402-14U-SW