




PH8000 series

Project:	Type:
Item. No.	
Location:	
Notes:	

POWRFLEX harness



PH8000 cross section

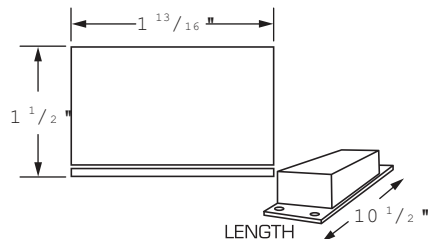

specifications

electrical

- Electrical rating: 120V, 60Hz , 12 Amp
- Power cord: 10' 16/3 SPT-3 (black) with right angle NE plug
- Up to 6 Tamper-Resistant electrical receptacles
- Illuminated rocker switch and circuit breaker combination (where applicable) -Catalog number suffix = SW
- One receptacle is turned 90° to accommodate plug-in adapters without blocking adjacent outlets

construction

- High-impact, flame resistant PVC
- Finish: black

mounting/installation

- Recessed or surface mounting using screws (not included) for recess mounting, route $1\frac{7}{8}$ " x $9\frac{5}{8}$ "

warranty/certification

- 1 year
- UL and cUL (complies with UL962A)

options

- 10' 14/3 SJT (black) power cord with right angle plug
- RJ45, Cat 5e and Cat 6 data jacks and cables for high-speed connectivity
- Charging USB
- Surge suppression
- On/off rocker switch on remote lead-length to be specified by customer - Catalog number suffix = RSxx"
- RJ11 phone jack with 14' cable
- 48" coaxial cable
- Custom options - *contact factory*



1
YEAR
WARRANTY



ordering information

item number w/ 10' 16/3 SPT-3	item number w/ 10' 14/3 SJT	catalog number	# outlets	coaxial/phone/data	mounting
5000-8601	5000-0619	PH8601-SW	6	none	surface
5000-0946	N/A	PH8601-RS36	6	none	surface
5000-0891	5000-1060	PH8602-SW	6	none	recess
5000-8622	5000-1062	PH8622-SW-5e	6	(1)RJ45 Cat 5e data jack & cable	recess
5000-0738	N/A	PH8542-SW-5e/5e	5	(2) Cat 5e data jack & cable	recess
5000-1143	N/A	PH8522-16UTR-SW5e	5	(1) Charging USB, (1) RJ45 - Cat 5e	recess
N/A	5000-1174	PH8522-14UTR-SW5e	5	(1) Charging USB, (1) RJ45 - Cat 5e	recess



PH8601-SW



PH8542-SW-5e/5e



PH8522-16UTR-SW5e