




Project: \_\_\_\_\_ Type: \_\_\_\_\_  
 Item. No. \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Notes: \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

# RDF60

*recessed downlight - flanged*

**standard features**

- Electrical rating: 120V, 60Hz
- LED integrated technology (non-replaceable lamp)
- Initial lumens: 760
- Beam angle: 120°
- Power Cord: 18/2 SPT-2 (black)
- Finish: Painted: black (BK), white (WH)  
Plated: antique brass (AB), brushed nickel (BN), polished brass (PB), polished chrome (PC)
- Construction: steel
- Installation methods: adjustable mounting ring, spring clips or screw holes. Installation hole diameter 3 3/8" for the adjustable ring or screw holes; 3 3/4" for spring clips.
- Height: 2 7/8"
- Diameter: 3 1/4"
- Compatible with Specialty Lighting PH3121 (on/off switch) and PD6113 (full range rotary dimmer)
- 8 watt
- 5 year warranty
- Link up to 50 fixtures maximum
- UL and cUL

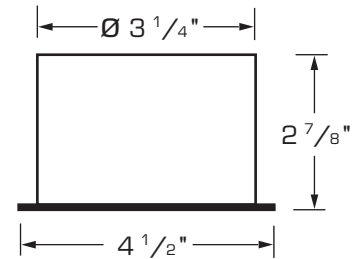

**ordering information**

product	color temp	wiring	connector style	finish	installation method
<b>RDF60</b>	<b>830</b>	<b>3</b>	<b>S</b>	<b>PB</b>	<b>SH</b>
	827 2700K extra warm 830 3000K warm	1 10' power cord with roll switch located 5' from plug 2 10' power cord with roll switch located 5' from plug & 30" extension with female connector 3 30" male & female extensions 4 30" male extension	S standard T t-shaped	AB Antique Brass BK Black BN Brushed Nickel PB Polished Brass PC Polished Chrome WH White (minimums may apply)	R ring mount SC spring clip SH screw hole*  * Brushed Nickel finish not available with screw hole mount