



Project: _____ Type: _____

Item No. _____



Location: _____

Notes: _____

LSC UV-C cabinet light

standard features

- Input voltage standard & UV-C mode: 100-240VAC
- Lamp type: LED
- Wavelength: 270-280 nm
- Power standard mode: 6W, 9W, 12W
- Power UV-C mode: 2.5W, 4.5W, 5.4W
- Color temperature: 3000K
- Lumens: 500 lm, 800 lm, 1000 lm
- UV-C radiated optical power: 36 mw, 60 mw, 72 mw
- Dimensions: 12.40" x 1.57" x 0.79" / 18.41" x 1.57" x 0.79" / 24.41" x 1.57" x 0.79"
- Construction: Aluminum and silica glass
- Power supply (driver): UL & cUL listed, 12W wall mount power supply with 5' quick-disconnect power cord
- Connecting cable: Fixture comes with 3' connecting cord
- Sterilization time - delayed: 30 seconds
- Cumulative working time: 60 minutes

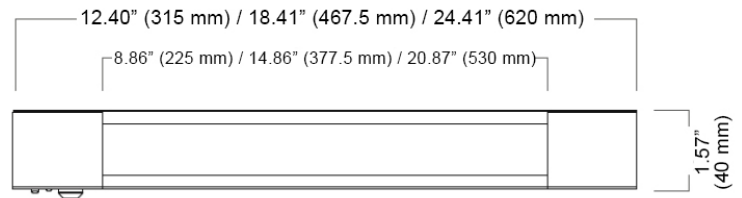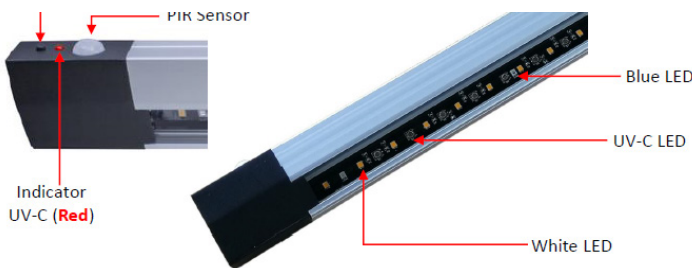

ordering information

item number	power standard mode	power UV-C mode	voltage	dimensions	wavelength	UV-C radiated optical power	lamp
SL-UB-UV-C-LSC6W	6W	2.5W	100-240VAC	12.40" x 1.57" x 0.79"	270-280 nm	36 mw	LED
SL-UB-UV-C-LSC9W	9W	4.5W	100-240VAC	18.41" x 1.57" x 0.79"	270-280 nm	60 mw	LED
SL-UB-UV-C-LSC12W	12W	5.4W	100-240VAC	24.41" x 1.57" x 0.79"	270-280 nm	72 mw	LED

item number	lumens	color temp.	power supply	sterilization time - delayed	cumulative working time
SL-UB-UV-C-LSC6W	500	3000K	12W driver	30 sec	60 min
SL-UB-UV-C-LSC9W	800	3000K	12W driver	30 sec	60 min
SL-UB-UV-C-LSC12W	1000	3000K	12W driver	30 sec	60 min



12W wall mount power supply with 5' quick-disconnect power cord (included with each fixture)