





Project:	Type:
Item No.	
Location:	
Notes:	

UV-C LED Bar

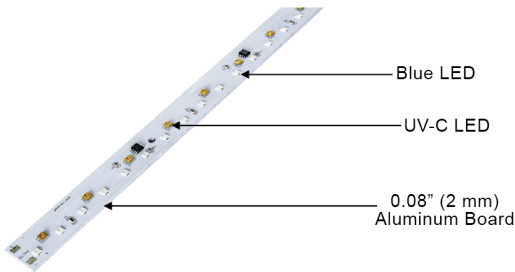

standard features

- Input voltage: 24V
- Current: 30mA, 60mA, 100mA, 150mA
- Lamp type: 21 UVC LED (3535 package), 42 Blue LED (2835 package)
- Wavelength: UVC LED 265-280 nm, Blue LED 395 nm
- Power: UVC LEDs 5W, Blue LEDs 3.3W / UVC LEDs 10W, Blue LEDs 3.3W, / UVC LEDs 16.8W, Blue LEDs 3.3W / UVC LEDs 25W, Blue LEDs 3.3W
- Dimensions: 23.62" (600mm) x 0.79" (20mm) x 0.08" (2mm)
- Construction: Aluminum
- Working temperature: -4°F (-20°C) - 104°F (40°C)
- Storage Temperature: -4°F (-20°C) - 113°F (45°C)
- Life: >30,000 hours

ordering information

item number	power		current	voltage	dimensions	wavelength		lamp	
	UVC LEDs	blue LEDs				UVC LEDs	blue LEDs	UVC LEDs	blue LEDs
SL-LS-UVC4-30	5W	3.3W	30mA	24V	23.62" x 0.79" x 0.08"	265-280 nm	395 nm	21	42
SL-LS-UVC4-60	10W	3.3W	60mA	24V	23.62" x 0.79" x 0.08"	265-280 nm	395 nm	21	42
SL-LS-UVC4-100	16.8W	3.3W	100mA	24V	23.62" x 0.79" x 0.08"	265-280 nm	395 nm	21	42
SL-LS-UVC4-150	25W	3.3W	150mA	24V	23.62" x 0.79" x 0.08"	265-280 nm	395 nm	21	42