



Project: \_\_\_\_\_ Type: \_\_\_\_\_


Item. No. \_\_\_\_\_

Location: \_\_\_\_\_

Notes: \_\_\_\_\_

# DPC1

## designer power communication series

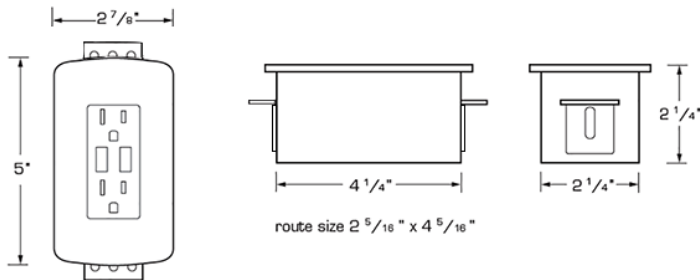

### specifications

#### electrical

- Electrical rating: 120V, 60Hz
- Power cord: 10' 14/3 SJT (black) with right angle NE plug
- Tamper-resistant outlets (meets NEC requirements)
- Powered USB (A-style) – compatible with USB 2.0 & 3.0 devices

#### construction

- Metal
- Finish: black

#### mounting/installation

- 2 mounting brackets (when installed, no exposed hardware), adjustable for different panel thickness (min 1/2" – max 1 1/4")
- Recess mount only – see drawing for route size

#### warranty/certification

- 1 year
- UL and cUL

#### options

- Hospital grade outlets and power cord
- Surge suppression (SS)
- Female connector (FC)
- The following options are available – minimums may apply
  - Circuit breaker (BR)
  - Rockerswitch (RKS) or switch/breaker combo (SW)
  - Non-powered pass-thru telephone, data, HDMI, etc.
  - Finishes below, other than standard black







### ordering information (example: DPC1-B5-1-WH)





product	model	module type & color (see next page)	power cord	finish	surge	options
DPC	1	B5	1	WH		
DPC	1 1 module	A-J 15A O-W 20A color options 1 black 2 ivory 3 light almond 4 nickel* 5 white 6 grey* 7 red* *not available for all module types	1 10' 14/3 SJT (standard with 15A modules) 2 10' 14/3 SJT-HG 3 10' 12/3 SJT-20A (standard with 20A modules) 4 10' 12/3 SJT-HG	BK black (standard) IV ivory LA light almond NK nickel WH white	blank none SS surge	blank none FC female connector BR breaker SW switch/breaker combo RKS rocker switch

module selection

15A modules – for use with 14/3 power cord

			
A two outlets	C two outlets two charging USBs (3.1A total charging capacity)	H Hospital Grade two outlets	J Hospital Grade two outlets two charging USBs (3.1A total charging capacity)

20A modules – for use with 12/3 power cord

			
O two outlets	Q two outlets two charging USBs (3.1A total charging capacity)	U Hospital Grade two outlets	W Hospital Grade two outlets two charging USBs (3.1A total charging capacity)

color options for modules

						
1 = black (standard)	2 = ivory	3 = light almond	4 = nickel*	5 = white	6 = grey*	7 = red*