

Project: _____ Type: _____

Item. No. _____

Location: _____

Notes: _____

ProFlex strip SO - standard output

LED

specifications

electrical

- Operating voltage: 24V
- Power: 1.3W per foot
- 18 diodes per 12" strip; spaced at 11/16" OC
- Indoor use

lighting source

- LED
- Lumens: up to 125 lumens per foot
- Multiple color temperatures available
- LED color options: red, blue, green, yellow
- Rated life: >36,000 hrs

construction


- Flexible LED strip for curved or straight rows

mounting/installation

- Easy adhesive mount
- 12" LED strip can be field cut into 4" sections (may also be purchased as a 30' spool)
- Direct linkable or link with 12" jumper

warranty/certification

- 3 years
- cULus listed

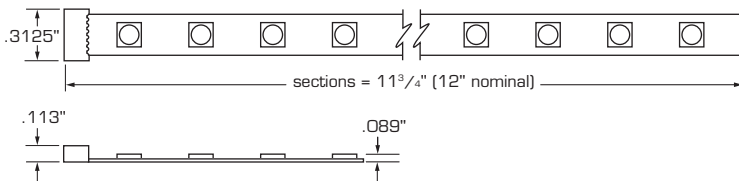

ordering information

item number	catalog number	voltage	watts/ft	lumens/ft	CRI	color temp	description
8700-0200	ENLED-PSSO-24-65K	24	1.3	125	>80	6500K	12" standard output LED strip
8700-0201	ENLED-PSSO-24-41K	24	1.3	117	>80	4100K	12" standard output LED strip
8700-0202	ENLED-PSSO-24-35K	24	1.3	105	>85	3500K	12" standard output LED strip
8700-0203	ENLED-PSSO-24-27K	24	1.3	105	>85	2700K	12" standard output LED strip
8700-0205	ENLED-PSSO-24R	24	1.3	26	—	red	12" standard output LED strip
8700-0206	ENLED-PSSO-24Y	24	1.3	26	—	yellow	12" standard output LED strip
8700-0207	ENLED-PSSO-24G	24	1.3	54	—	green	12" standard output LED strip
8700-0208	ENLED-PSSO-24B	24	1.3	17	—	blue	12" standard output LED strip

accessories


item number	catalog number	voltage	length	description
8700-0220	ENLED-PSSO-24J12	24	12"	jumper for connecting 2 LED strips
8700-0221	ENLED-PSSO-24PF12	24	12"	power feed for LED strip (1 per driver)
8700-0223	ENLED-PSSO-24XCON	24	—	"X" connector for multiple LED strips



8700-0221
Power Feed



8700-0220
strips can be connected by jumper

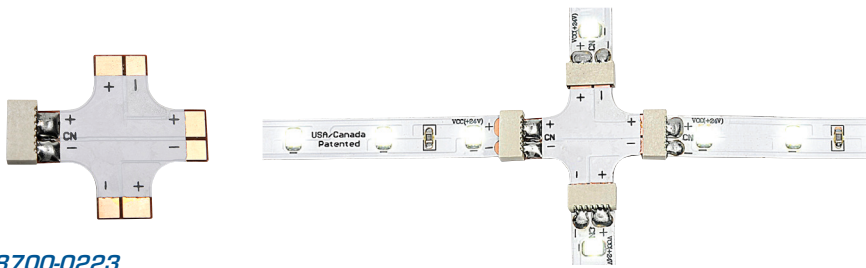

8700-0223

The "X" connector allows for more complex design aspects to be met without breaking the continuous run of LEDs

drivers

item number	catalog number	voltage	wattage	L x W x H	description
8900-0200	ENLED-DRVR-PS24-25W	24	25	9.50" x 1.75" x 1.25"	25W driver with 5.5' power cord & 5.5' connecting cord, indoor/outdoor
8900-0201	ENLED-DRVR-PS24-60W	24	60	9.50" x 1.75" x 1.25"	60W driver with 5.5' power cord & 5.5' connecting cord, indoor/outdoor
8900-0202	ENLED-DRVR-PS24-100W	24	100	9.50" x 2.50" x 1.44"	100W driver with 5.5' power cord & 5.5' connecting cord, indoor/outdoor
8900-0203	ENLED-DRVR-PI24-30W	24	30	3.75" x 1.68" x 1.12"	30W driver with 5.5' power cord & 5.5' connecting cord, indoor only
8900-0204	ENLED-DRVR-PI24-60W	24	60	4.62" x 2" x 1.25"	60W driver with 5.5' power cord & 5.5' connecting cord, indoor only



8900-0200
25W
120V-277V
50/60Hz



8900-0201
60W
120V-277V
50/60Hz



8900-0202
100W
120V-277V
50/60Hz



8900-0203
30W
120V-277V
50/60Hz



8900-0204
60W
120V-277V
50/60Hz