



Project: _____ Type: _____


Item No. _____

Location: _____

Notes: _____

LumiSlat

wall/ceiling lighting system

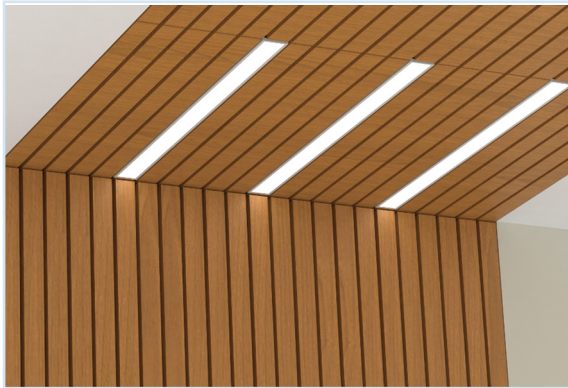

specifications

electrical

- Dimmable driver: 0-10V (120V-277V)
- Non-dimming driver: 120V and 277V

lighting source

- LED with optical film-protected diffuser
- LED color temperature: 2700K, 3000K, 3500K, and 4000K standard. Other color temperatures available.
- Lumen output: Up to 960 lumens per foot

housing

- Finish: Black (BK) or White (WH)
Custom finishes options available - Specify RAL color
- Construction: Extruded aluminum

dimensions

- Standard width options: 3 1/4", 5 1/4"
- Custom widths available
- Standard length options: Nominal 2', 3', 4', 5', 6', 7', and 8'
- Custom lengths available

mounting/installation

- Mounting hardware provided
- Remote drivers (Installed max 60' from fixture)

warranty

- 3 years

certification

- UL listed

