

Spec Sheet RGBW flexible LED sheet


Project:

ltem. No.

Location:

Notes:

LightWave

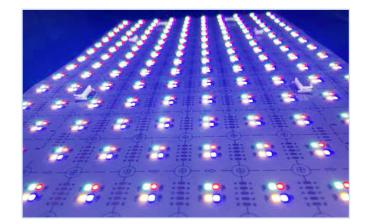

7. 1	2x	24	=1	15.	2L	ED	s																							
		25	5.4	<u>2</u> m	m	/1	"		_						_	-			_		_				_					
	/	1		X			X		迷			冰			冰			X)			×		×			X	
	/			1								X			1									×				*		
	/			X			*- ×-	×	XX			X		×	X		×	X		×				X		×		×		
	/						036																	X						
				*			4		*						*			*						X	× •				•	
			- ×					• · ×	X		• ×	X			X			X			i.			¥	×			×		
			- X-	*			0	•X			•X	i)K	*	•				*	*	¢->		*	¢-36	*	×			×		1
			×	×				• - ×				X												×	× •				•	**
				*				• · ×	· ·			*		*	*		*	*		*	*		*	X	×-•	*				
				*			X		X			X		*	X		× 1	+XX		×			1	X		×		*		
	•			*			-0-36		*			.*		*	-			-		*				***		*		*		
				0			-0X			*					······································									-					-0-	

ordering information

RGBW flexible LED sheet

Type:

specifications

electrical

- Electrical rating: 24V DC
- Wattage: 11W
- PCB Type: FPC 35um/35um
- IP rating: IP20

optical characteristics

- Lamp source: LED
- Color temperature: Red, Green, Blue, White (5000K)
- Beam angle: White (5000K) 120 $^{\circ}$

mounting/installation

- Installation method: 3M Double-sided tape
- Connectors: 16pcs input/output
- Can be linked with connecting cables (included), maximum 80W
- Field cuttable: Can be cut at each LED in 0.66" segments

dimensions

305mm/ 12"

• 12" x 24" x 9/32" (305 x 610 x 7mm)

warranty

• 5 years



item number	sheet size	LED type	LED qty	color temp (k)	lumens (lm)	Ra	power	beam angle
LW1224-RGBW-11	12" x 24" x 9/32" (305 x 610 x 7mm)	RGBW	4 x 288	Red, Green, Blue, 5000K	Red - 200 Green - 880 Blue - 150 White - 1180	>80 white (5000K)	4 x11W	120° white (5000K)

standard accessories included: Connection cables: two 2.05" (52mm) and two 5.90" (150mm)